

Summary of Staefa MS1800 Hardware Version Styles of Controller;  
(Images below)

NCRE/A;

Disk style battery in lower right corner

4ea Smart2 Trunks

2ea LAN A/B Trunks

Ethernet Port

New style hardware

NCREL/A (aka Mini);

Disk style battery in lower right corner

2ea Smart2 Trunks

No LAN A/B Trunks

Ethernet Port

New style hardware

NCRE;

2/3A style battery in upper right corner

4ea Smart2 Trunks

2ea LAN A/B Trunks

No Ethernet Port

Replaceable fuses for Smart2 & LAN trunks.

Old style hardware



*Figure 1. MS1800 NCRS Controller.*


# NCRE/A

Spare battery holder. For shipping/storage.

Disk style battery.

Firmware Chips

GAL Chip

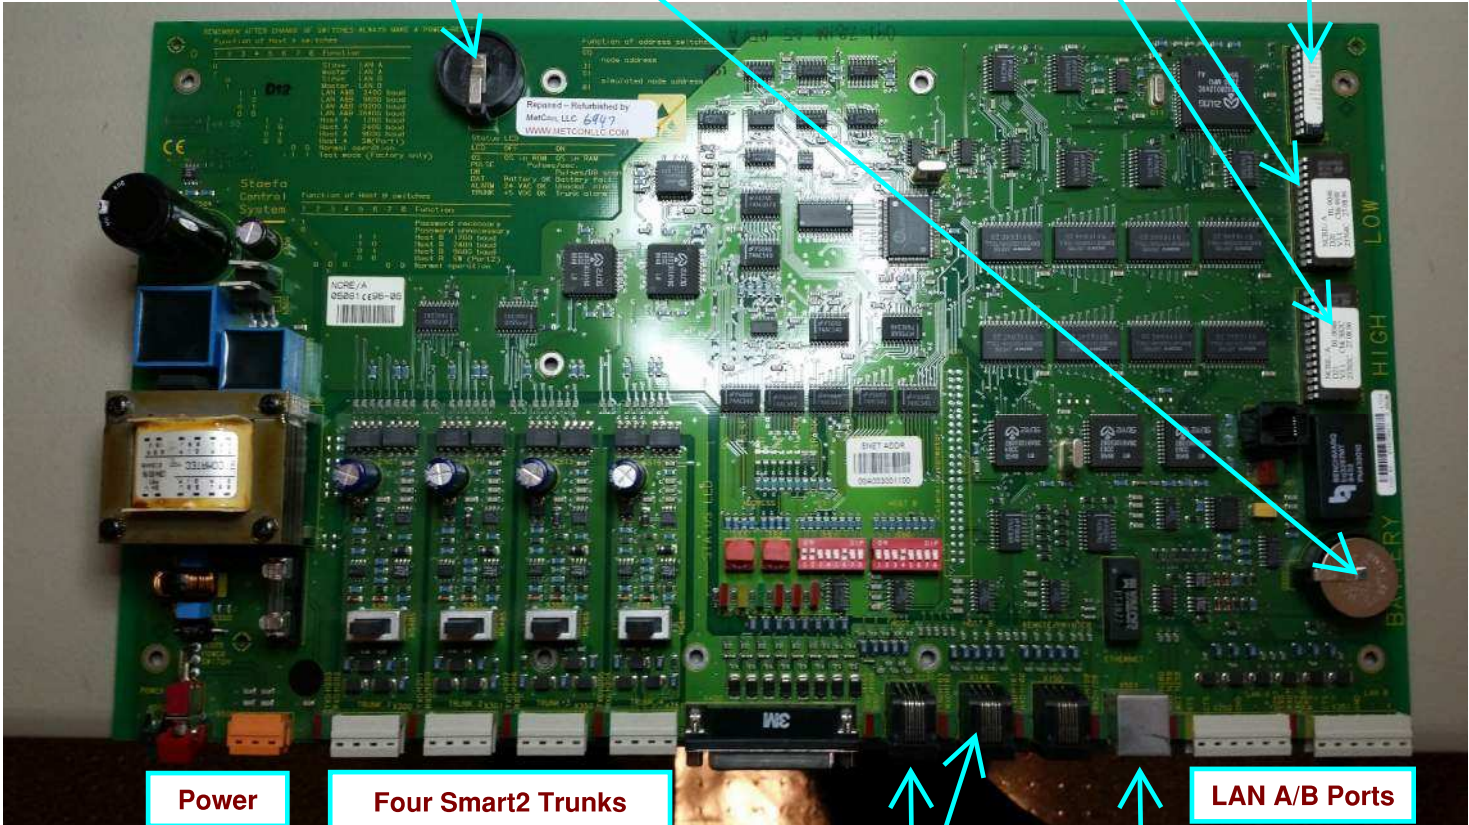

Power

Four Smart2 Trunks

RS232  
Serial  
Host  
A/B  
Ports

Ethernet  
Port

LAN A/B Ports




# NCRE.L/A (Mini)

Spare battery holder. For shipping/storage.

Disk style battery.

Firmware Chips

GAL Chip

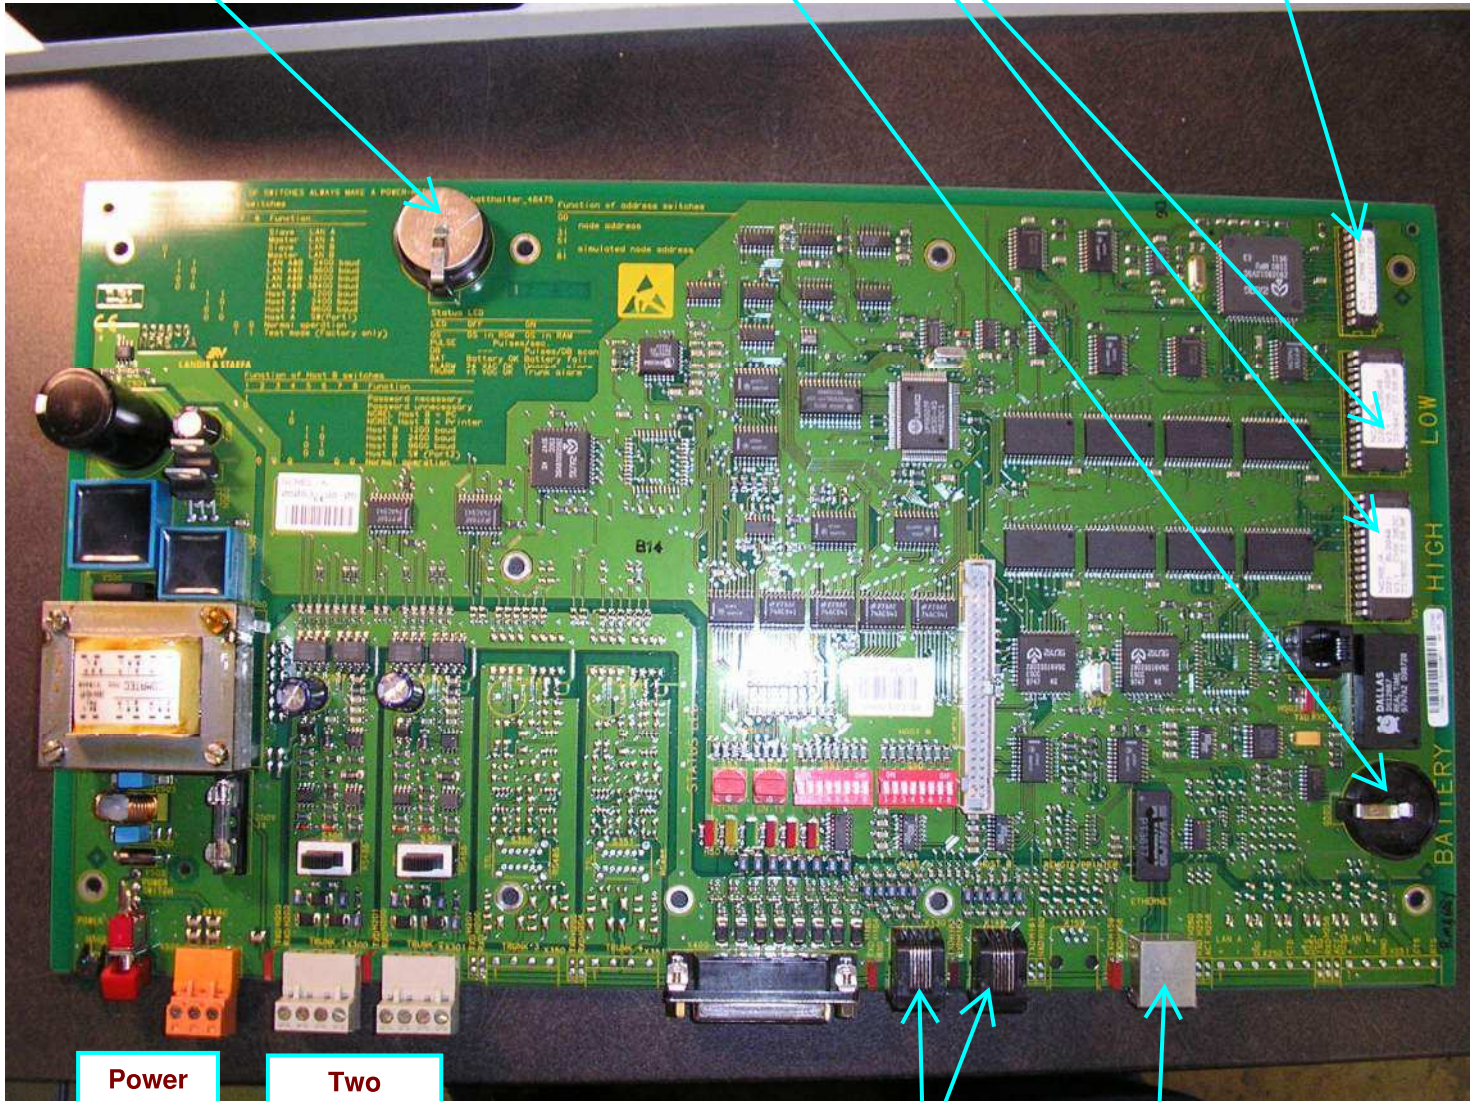

Power

Two Smart2 Trunks

RS232 Serial Host A/B Ports

Ethernet Port




# NCRE (aka NCRS)

GAL Chip

Firmware Chips

2/3A  
style  
battery.

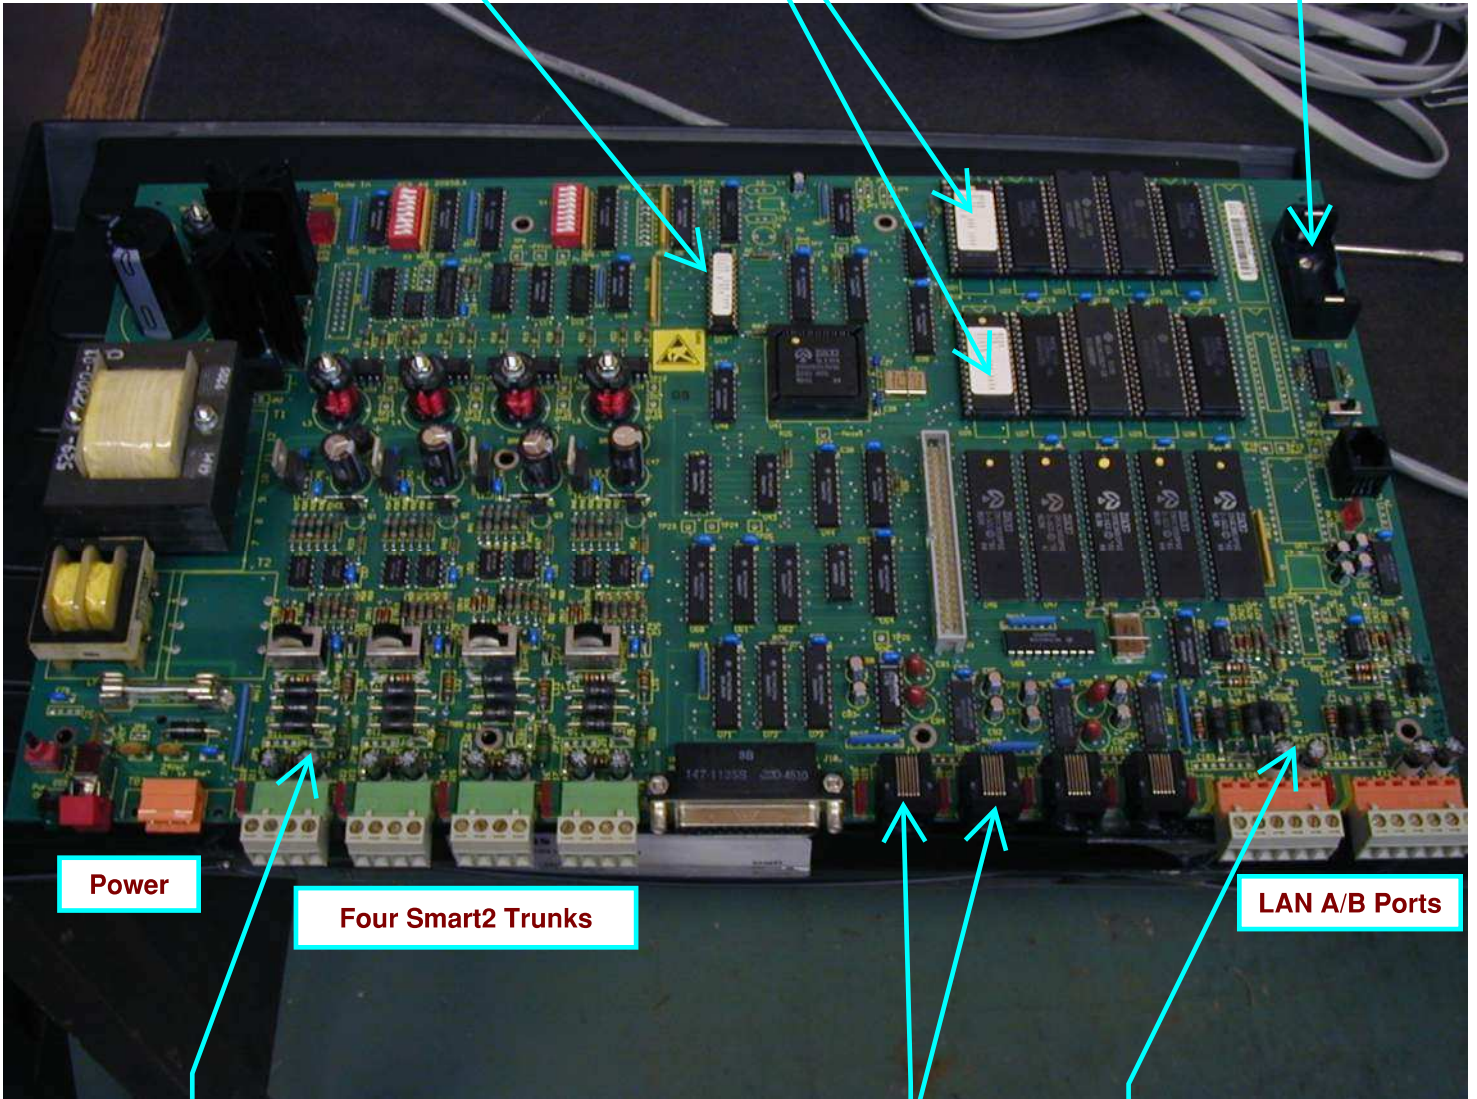

Power

Four Smart2 Trunks

LAN A/B Ports

Replaceable  
fuses

RS232  
Serial  
Host  
A/B  
Ports

Replaceable  
fuses